

2300 EX



www.ommelift.dk

ARTICULATED PLATFORM MOUNTED ON TRAILER

OMMELIFT




Quality since 1906

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme
Phone: + 45 753 413 00 – Fax: + 45 753 415 92
E-mail: omme@ommelift.dk – Web: www.ommelift.dk

2300 EX

Mounted on trailer

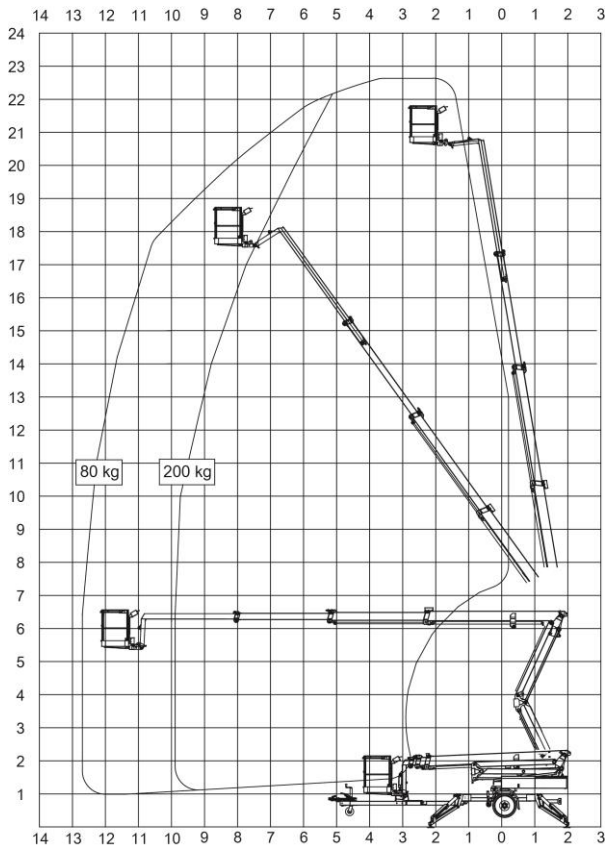

Technical data:	2300 EX	2300 EXB
Max. working height	22.60 m	
Max. outreach	12.70 m	
Max. basket load	200 kg	
Basket size	1.25x0.8x1.1m	
Turnable basket	± 41°	
Rotation	± 400°	
Power supply	230V16A	230V16A
Charger		
Transport length		
Transport height	7.32 m	
Transport width	1.99 m	
Operational width	1.70 m	
Total weight	4.21 m	4.21 m
Controls	3150 kg	
Hydraulic stabilizers	+	
Hydraulic propulsion	+	
230 V outlet in basket	+	

+ Standard

LARGE GROUND CLEARANCE



Turnable basket



Propulsion



Large outreach



Easy control

- 2300 EX is powered by an electric motor, connected to 230 V mains and is especially suitable where continuous operation is required. 2300 EXB is powered by a heavy duty battery pack, in total 24V/200 Ah/5h. Operation is possible independently of 230 V mains connection.
- The low centre of gravity provides a secure transport after the towing vehicle.
- The 2300 EX platforms are mounted with hydraulic propulsion, turnable basket and hydraulic stabilizers. When equipped with hydraulic propulsion the platform can propel itself around the work site. Operation from a special platform, giving a complete overview. The turnable basket makes it possible for 2 persons to operate parallel with e.g. a facade.
- The 2300 EX platforms are equipped with an unfolding scissor system, giving the lift an increased up and over outreach over high obstacles. When operating the scissor system up and down the basket will follow a vertical line. Furthermore the lift has no tail swing at rotation. Electric wiring to the basket is protected inside the telescopic boom. The telescopic cylinder is protected under the boom.
- The 2300 EX platforms are fitted with straightforward control, in the basket and at ground level. The hydraulic levers for the stabilizers are placed centrally on the chassis. The proportional controls ensure steady and smooth movements.