

Material Lifts

Super Hoist™

Specifications

Models	GH-3.8		GH-5.6	
Measurements	Metric	US	Metric	US
A Height - stowed	1.04 m	3 ft 5 in	1.37 m	4 ft 6 in
- lifting height	3.80 m	12 ft 5.6 in	5.60 m	18 ft 4.5 in
B Length - platform	48 cm	1 ft 7 in	48 cm	1 ft 7 in
C Width - platform	61 cm	2 ft	61 cm	2 ft
D - base (corner to corner)	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in

Productivity

Load capacity	136 kg	300 lbs	113 kg	250 lbs
Storage/transport dimensions	36 cmx36 cmx1 m	14x14x39.5 in	36 cmx36 cmx1 m	14x14x39.5 in
Wheels, solid non-marking	20 cm diam.	8 in diam.	20 cm diam.	8 in diam.


Power

Recommended PSI	5.86 bar	85 psi	5.86 bar	85 psi
-----------------	----------	--------	----------	--------

Weight

	34 kg	75 lbs	37 kg	82 lbs
--	-------	--------	-------	--------

Standards Compliance EU Directive: 2006/42/EC (Machinery)

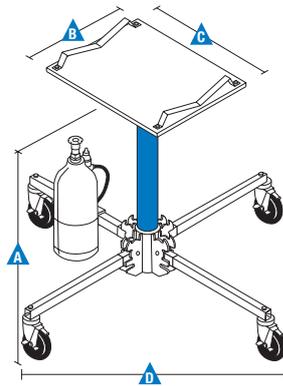

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

Measurements

GH™-3.8

- 3.80 m (12 ft 5.6 in) lifting height
- 136 kg (300 lbs) load capacity

GH-5.6

- 5.60 m (18 ft 4.5 in) lifting height
- 113 kg (250 lbs) load capacity

Productivity

- Portable and compact design
- Up and down dump valve can be easily activated by patented control handle
- The Super Hoist sets up in seconds — no tools required
- The one-piece platform attaches to cylinder with a twist of the wrist
- Legs fold up for easy storage
- Easy-to-release leg lock keeps legs up for storage and out for use
- Wheel brakes
- Auto-lubricating oil reservoir on top of each piston inside the cylinder
- Easy to service

Power

- Powered by CO₂ or compressed air
- One size fits all CO₂ bottle mounting bracket

Platform

- One-piece platform

Base Options

- GH 3.8
- GH 5.6

Wheels

- Solid, non-marking, 20 cm (8 in) diameter (standard)

Productivity

- Platform cradle package



United Kingdom and MESART

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com
 Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381, Email AWP-InfoME@terex.com
 Visit www.genielift.com/en-gb/about-genie/locations to view our global locations list.

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2019 Terex Corporation.

